


Inch Thin Wall Bearings

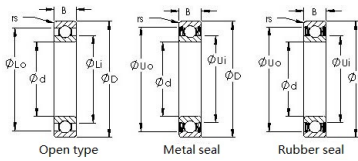

seleccionar	Consulta	Bearing Number	Dimensions			Basic Load Rating	
			d	D	B	Cr(N)	Cor(N)
R1038	9.525 mm	15.875 mm	3.967 mm	96	53		
R1038 2RS	9.525 mm	15.875 mm	3.967mm	96	53		
R1038zz	9.525 mm	15.875 mm	3.967mm	96	53		
R1212	12.7 mm	19.05 mm	3.967 mm	111	71		
R1212 2RS	12.7 mm	19.05 mm	3.967 mm	111	71		
R1212zz	12.7 mm	19.05 mm	3.967 mm	111	71		
R1458	15.875 mm	22.225 mm	3.967 mm	116	81		
R1458 2RS	15.875 mm	22.225 mm	3.967mm	116	81		
R1458zz	15.875 mm	22.225 mm	3.967 mm	116	81		
R1634	19.05 mm	25.4 mm	3.967 mm	127	99		
R1634 2RS	19.05 mm	25.4 mm	3.967 mm	127	99		
R1634zz	19.05 mm	25.4 mm	3.967 mm	127	99		
R1878	22.225 mm	28.575 mm	3.697 mm	137	109		
R1878 2RS	22.225 mm	28.575 mm	3.967 mm	137	109		
R1878zz	22.225 mm	28.575 mm	3.967 mm	137	109		
R2127	26.988 mm	33.338 mm	3.967 mm	145	128		
R2127 2RS	26.988 mm	33.338 mm	3.967 mm	145	128		
R2127zz	26.988 mm	33.338 mm	3.967 mm	145	128		
R2420	31.75 mm	38.1 mm	3.967 mm	154	146		
R2420 2RS	31.75 mm	38.1 mm	3.967mm	154	146		
R2420zz	31.75 mm	38.1 mm	3.967 mm	154	146		

Inch Thin Wall Bearings

R2622	34.925 mm	41.625 mm	3.967 mm	163	165
R2622 2RS	34.925 mm	41.625 mm	3.967 mm	163	165
R2622zz	34.925 mm	41.625 mm	3.967 mm	163	165
R2824	38.1 mm	44.45 mm	3.967 mm	166	174
R2824 2RS	38.1 mm	44.45 mm	3.967 mm	166	174
R2824zz	38.1 mm	44.45 mm	3.967 mm	166	174
R3026	41.625 mm	47.625 mm	3.967 mm	175	192
R3026 2RS	41.625 mm	47.625 mm	3.967 mm	175	192
R3026zz	41.625 mm	47.625 mm	3.967mm	175	192